



# QSL™ Series Filter Cartridges

## *Serial Layered Design for Optimized Prefiltration*

Incorporating a polypropylene microfiber media over a polyethersulfone membrane, the serial layered QSL cartridge design offers excellent retention characteristics and extended life to provide long lasting protection of downstream final filters. By preventing early blockage of downstream filters, the QSL contributes significantly to an economical overall design of your filtration system.

### Product Specifications

**Media:** Polypropylene & Polyethersulfone  
**Inner core, end caps, cage:** Polypropylene  
**Gaskets/O-Rings:**  
Buna-N, EPDM, Silicone, Teflon  
Encapsulated Viton, Viton  
**Micron rating:** 0.2, 0.5 µm  
**End styles:** P (DOE), P2 (226/flat), P3 (222/flat), P7 (226/fin), P8 (222/fin), AM, NPC

### Dimensions

**Nominal lengths:**  
5", 9.75", 10", 19.5", 20", 29.25", 30",  
39", 40"  
(12.7, 24.8, 25.4, 49.5, 50.8, 74.3, 76.2,  
99.1, 101.6 cm)

**Outside diameter:** 2.7" (6.86 cm)

**Inside diameter:** 1.0" (2.54 cm)

**Surface Area:** 7.0 ft<sup>2</sup> (0.65 m<sup>2</sup>)

### Operating Parameters

**Maximum operating temperature:**  
176°F (80°C)

**Maximum differential pressure:**  
75 psid @ 70°F (5.2 bar @ 21°C)  
30 psid @ 176°F (2.0 bar @ 80°C)

**Maximum reverse pressure:**  
40 psid @ 70°F (2.8 bar @ 21°C)

**Recommended change-out pressure:**  
35 psid (2.4 bar)

### FEATURES & BENEFITS


- Serial layered design — enhances capacity and simplifies prefiltration requirements
- Absolute rated (99.98%) — an ideal prefilter to 0.2, 0.45 and 0.65 micron membrane filters
- Fixed pore construction — resists dirt unloading at maximum differential pressure
- High surface area — high flow rate, and long service life — minimize maintenance cost
- Available with various gasket/O-ring materials — compatible with many fluids

### CERTIFICATIONS

- USP Class VI: Meets USP Class VI Biological Test for Plastics
- FDA Listed Materials: All materials comply with FDA Title 21 of the Code of Federal Regulations Sections 174.5, and 177.1520, as applicable for food and beverage contact.
- European Directive for Direct Food Contact: European Regulation No. 1935/2004 and European Regulation 10/2011: Tested for migration behavior and is suitable for contact with all kinds of foodstuffs with minimal rinse-up. Data available upon request.

### TYPICAL APPLICATIONS

- Wine/beer bottling
- Bottled water
- Process water
- Aqueous solutions
- Active Intermediates
- Diagnostic Reagents
- Culture Media
- Cosmetics



## PERFORMANCE SPECIFICATIONS

- Cleaning/Sanitization: Compatible with most common chemical cleaning, sanitizing and sterilizing agents and with pH range from 1–14. Consult factory for specific compatibility information. Cartridge will withstand hot water at 176°F (80°C) at 5 psid (0.35 bar) for 30 minutes.
- Steam/Autoclave: Cartridges may be autoclaved for 30 minutes at 250 °F (121°C) under no end load conditions. Cartridges fitted with steam insert may be steamed for at least 10 thirty minute cycles @ 275°F (135°C) not to exceed 3 psid (0.21 bar).


## QSL NOMENCLATURE INFORMATION

Filter Type	Retention Rating (microns)	Nominal Length (inches)	End Configuration	Gasket or O-Ring	Options	
QSL Series	0.2	-5	-29.25 <sup>1</sup>	P Double Open End	B Buna-N	-R Factory Rinse -I Steam Insert
		0.5	-9.75 <sup>1</sup>	-30	P2 226/Flat Single Open End	
		-10	-39 <sup>1</sup>	P3 222/Flat Single Open End	S Silicone	
		-19.5 <sup>1</sup>	-40	P7 226/Fin Single Open End	T Teflon encap. Viton	
		-20		P8 222/Fin Single Open End	T Teflon encap. Viton (O-Rings Only) <sup>2</sup>	
				AM Single Open End, Internal O-Ring	V Viton	
			NPC Double Open End, Internal O-Ring			
<b>Example: QSL0.5-20P3S-I</b>						
QSL	0.5	-20	P3	S	-I	

<sup>1</sup>Available only for DOE (P) configuration    <sup>2</sup>Not available in AM style

## QSL FLOW RATE

Typical Flow Rate Clean Water at Ambient Temperature  
(per 10" cartridge)

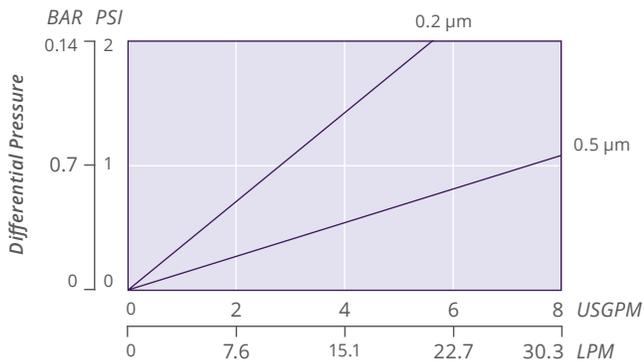

For liquids other than water, multiply pressure drop by the fluid viscosity in centipoise

## FOR MORE INFORMATION



Process Filtration and Fluid Handling Products

## DISTRIBUTED BY

970 Calle Negocio  
San Clemente, CA 92673  
www.clearsolutionscorp.com  
info@clearsolutionscorp.com  
(949) 429-8922 ph



Graver Technologies | 200 Lake Drive, Glasgow, DE 19702

A member of The Marmon Group—A Berkshire Hathaway Company